


# Cinema Double Tiers



Chandeliers

50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

**DESCRIPTION**

The Cinema Chandelier makes a bold statement with minimal effort, featuring a simple circular frame in a rich metal or powder coated finish embellished by the warm glow of opal glass fixtures. Evocative of Old Hollywood's charm, Cinema's theatrical features are customizable to various compositions.

**MATERIALS**

Steel frame with satin opal globes

**COLLECTION NOTES**

Please contact a Sales rep to learn more for multi-tier configurations not available for online preview.

**PERFORMANCE**

12 Globes 3110 lm | 24 Globes 6200 lm

Power Consumption for 12 Globes 108W | 24 Globes 216W

90 CRI

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

Patent Number D876,701

**CERTIFICATION**

UL Listed

Suitable for Damp Locations

**SUSPENSION**

White 8" round housing canopy (Contact your sales rep for more info)

Standard 72" white cord/cable. Recommended Hang Height 54". Minimum Hang Height 48" (central hang method) or 6" (perimeter hang method)

Cord/cable extension available (up to 150"). Field trimmable

**PRODUCT DIMENSIONS**

48 ØD x 24 in

**DIMENSIONAL WEIGHT**

333 lbs

---

YOUR PRODUCT CODE

**C44-66-PF12-27-120\_TM\_DEX**

---

Specification Logic

**GLOBE**

---

12 Globes (6 per Tier)	66
24 Globes (12 per Tier)	1212

**PRIMARY FINISH**

---

Matte White Fine Texture	PC20
Quartzite	PC21
Glacier	PC22
White Hybrid	PC23
Cream White	PC24
Silk Grey	PC25
Ochre Yellow	PC26
Emerald	PC28
Matte Black Fine Texture	PC30
Breccia	PC31
Glimmer	PC32
Blue Hammertone	PC33
Graphite	PC34
Blue Gloss	PC36
Army Green	PC37
Brown Gold	PC40
Putty	PC41
Vermillion Red	PC42
Vert Clair	PC43
Buff	PC44
Dark Blue	PC46
Dark Red	PC48
Chalk Pink	PC60
Custom Powder Coat	PCXX
Mottled Brass	PF11
Satin Nickel	PF12
Polished Chrome	PF13
Polished Copper	PF14
Warm Bronze	PF15
Polished Black Nickel	PF16
Satin Brass	PF17
Custom Plated Finish	PFXX

**CCT**

---



2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

**INPUT / CONTROL / POWER**



---

110-120V Input TRIAC / ELV / 0-10V, 1% dimming	120_TM_DEX
220-240V Input 0-10V, 1% Dimming	220_10_DEX
110-277V Input 0-10V, 0.1% dimming	277_10_DEX
110-277V Input DALI, 0.1% dimming	277_DL_DEX

# Drawings

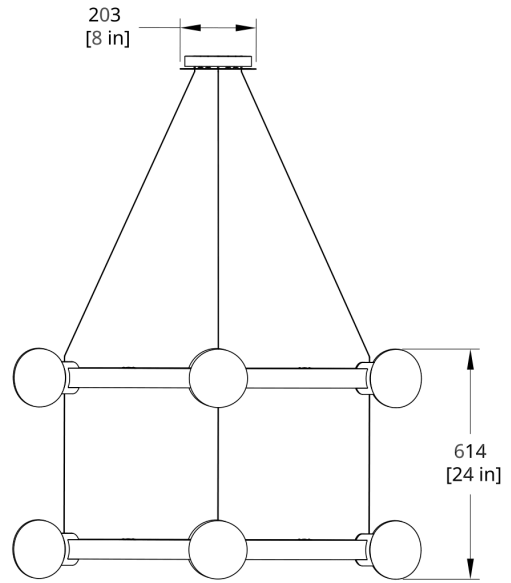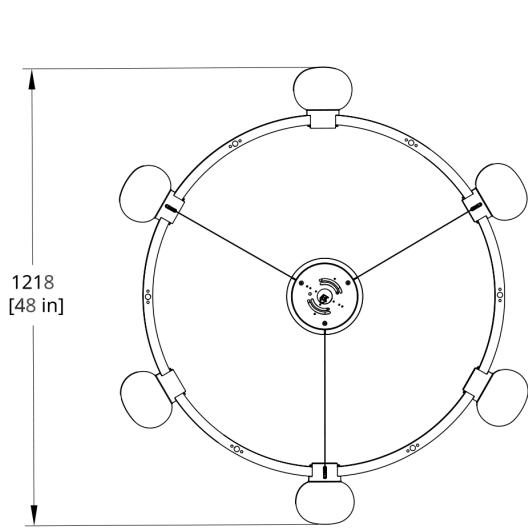

C44-66 Cinema Chandelier Dimension

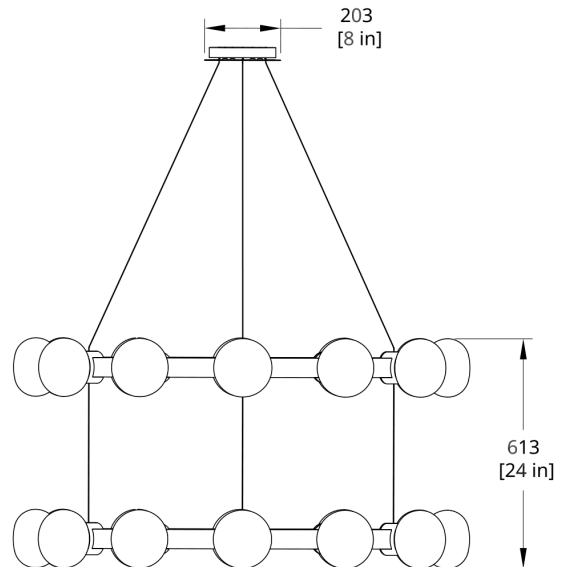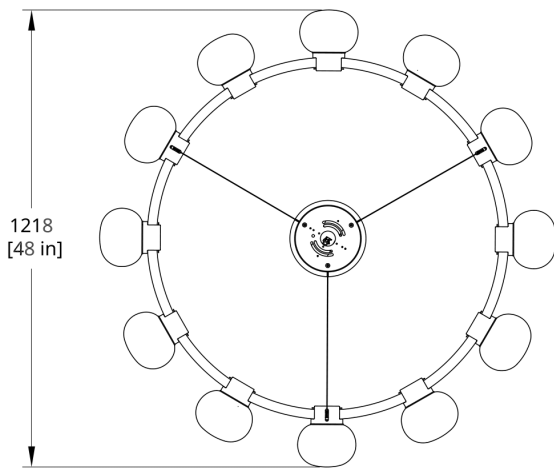

C44-1212 Cinema Chandelier Dimension