

# Gala 72"

Chandeliers



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

**DESCRIPTION**

Gala is a minimal, near-weightless take on the chandelier, rethought as a simple beam with power cords hidden inside the slim suspension cables. Its ivory-frosted glass fixtures, fixed in a variety of compositions, bring to mind hanging fruit. Voluptuous and handblown, each orb is subtly unique.

**MATERIALS**

Frosted glass globes, aluminum

**PERFORMANCE**

Estimate 1290 lm

Power Consumption 25W

Luminaire Watts 25W

90 CRI

**LED LIFESPAN**

50k hours

**CERTIFICATION**

UL Listed

Suitable for Damp Locations

**SUSPENSION**

Black or white 15" round flat canopy

Standard 120" cable. Recommended Hang Height 114". Minimum Hang Height 12"

Cable extension available (up to 200"). Field trimmable

**PRODUCT DIMENSIONS**

72 L x 6 W x 17" H

**PRODUCT WEIGHT**

22 lbs / 9.9 kg

**DIMENSIONAL WEIGHT**

106 lbs

---

YOUR PRODUCT CODE

**GC-72-10G-PC30-22-120\_TM\_DIN-CPYB**

---

Specification Logic

**DIFFUSER STYLE**

---

Symmetrical Mixed Globes	10G
Asymmetrical Mixed Globes	20G
Symmetrical Large Globes	30G

**PRIMARY FINISH**

---

Matte Black	PC30
Custom Powder Coat	PCXX

**CCT**

---

2200K (candle Light)	22
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

**INPUT / CONTROL / POWER**

---


110-120V Input TRIAC / ELV / 0-10V, 1% dimming	120_TM_DIN
220-240V Input 0-10V, 1% Dimming	220_10_DIN
110-277V Input 0-10V, 0.1% dimming	277_10_DIN
110-277V Input DALI, 0.1% dimming	277_DL_DIN

**CANOPY COLOR**


---

Black	CPYB
White	CPYW


Drawings

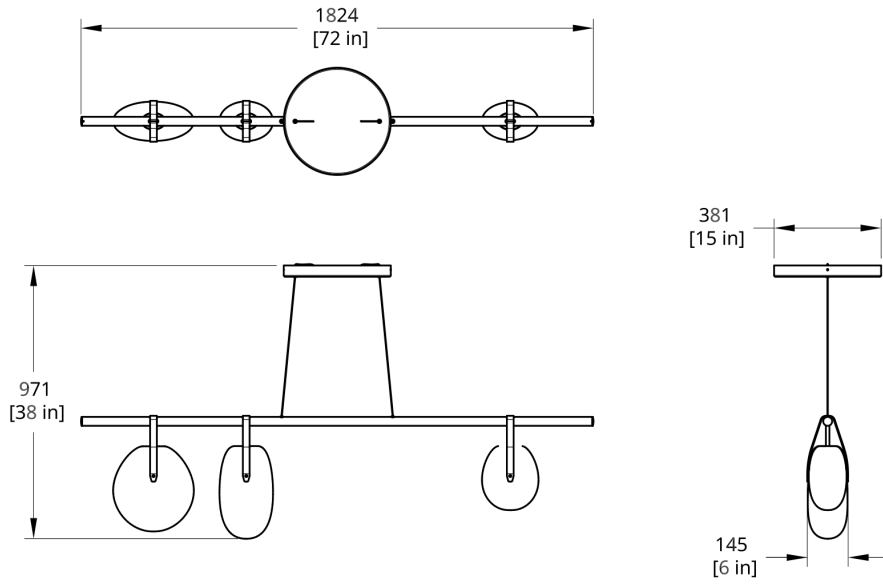

GC-72-20G Gala 72" Chandelier Dimension

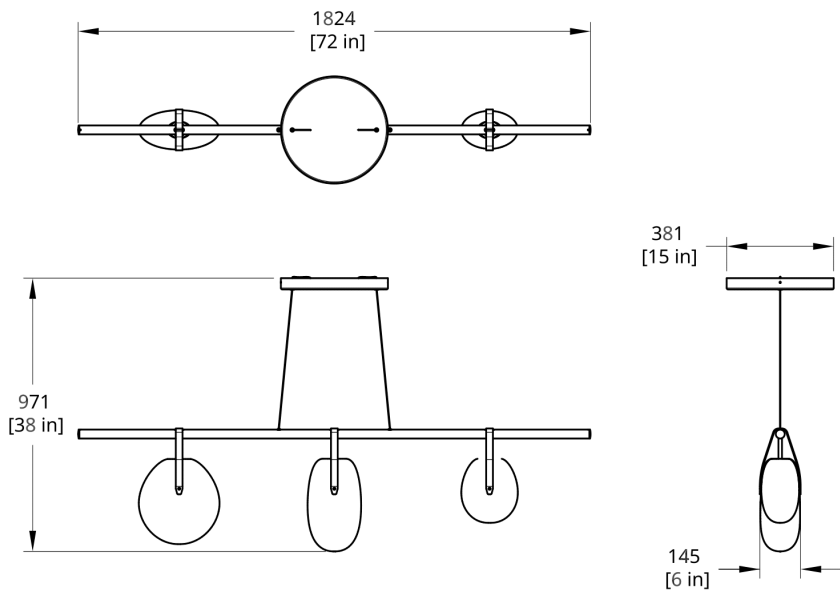

GC-72-10G Gala 72" Chandelier Dimension

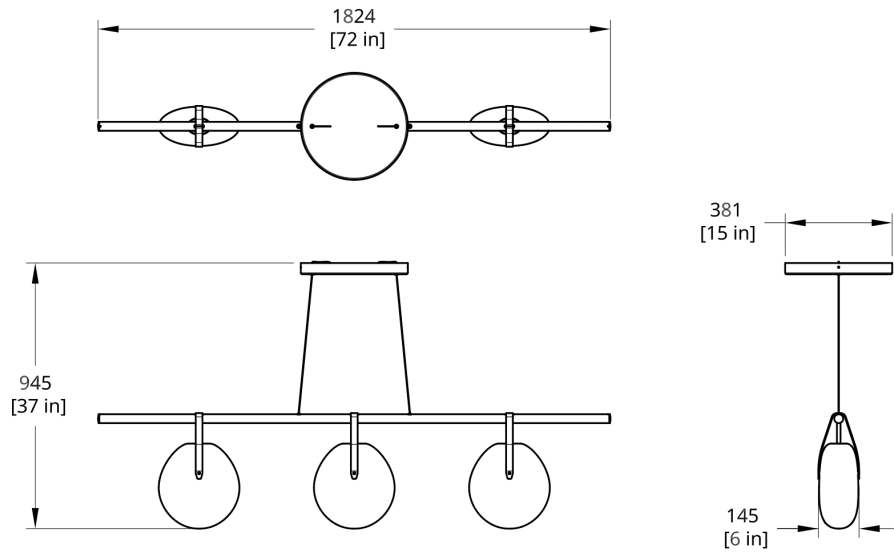

GC-72-30G Gala 72" Chandelier Dimension