


Queue Pendant Multi



Pendants

50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com

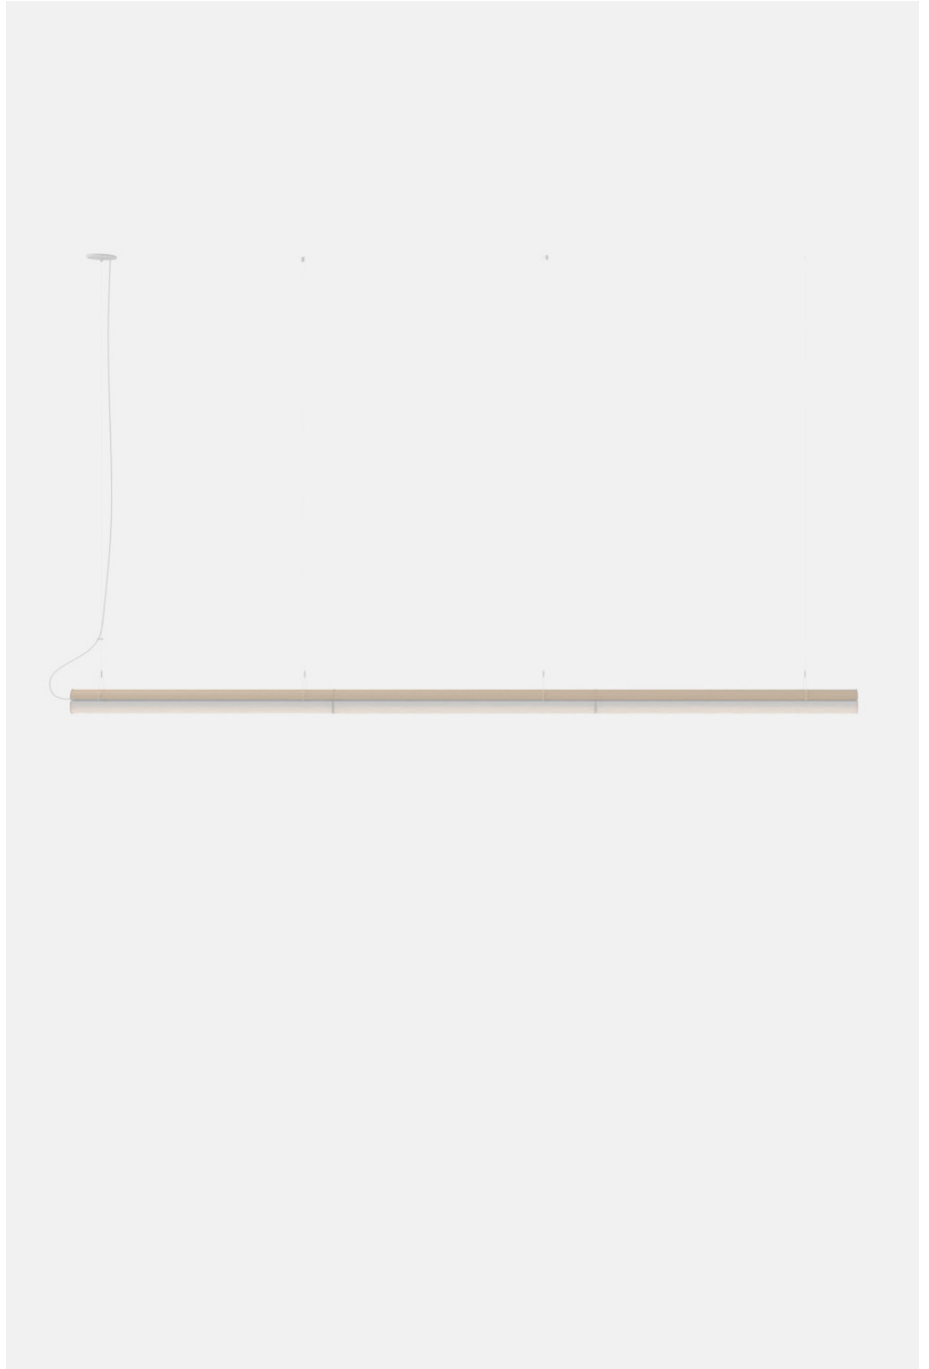

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

DESCRIPTION

Queue is a linear LED pendant system with limitless potential, designed for flexible installation and an inviting presence. These modular bars of light connect via linear sliding joints and hang from stainless steel wire loops, allowing for custom compositions tailored to the needs of the space.

MATERIALS

Textured PMMA lens, Anodized aluminum body

COLLECTION NOTES

Additional linear run can be specified. Download Tech Pack to specify alternating light direction per segment with our sales rep. These configurations are not available via online preview. White Gold AA-02 requires minimum 20 business day lead time.

PERFORMANCE

2300 lm for 44" run

Power Consumption 45W

Luminaire Watts 45W

86 lm/W

90 CRI

LED LIFESPAN

50k hours

CERTIFICATION

ADA Compliant

UL Listed

Suitable for Damp Locations

**SUSPENSION**

White 5" round flat canopy

Standard 72" cable. Standard Hang Height 66". Minimum Hang Height 12"

Cable extension available (up to 420"). Field trimmable

PRODUCT DIMENSIONS

44" run: 3 x 5 x 44 in L

DIMENSIONAL WEIGHT

YOUR PRODUCT CODE

QP-132-DDIF_INO-AA02-22-277_10_DIN

Specification Logic

LENGTH

44"	44
88"	88
132"	132
176"	176

DIFUSER STYLE (DIRECTION)

Direct / Indirect	DDIF_IDIF
Direct	DDIF_INO
Indirect	DNO_IDIF

PRIMARY FINISH

Clear Anodize	AA01
White Gold Anodize	AA02
Black Anodize	AA04
Custom Anodize	AAXX
Custom Powder Coat	PCXX


CCT

2200K (Candle Light)	22
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35


INPUT / CONTROL / POWER

110-277V Input 0-10V, 0.1% Dimming	277_10_DIN
110-277V Input Dali, 0.1% Dimming	277_DL_DIN
110-277V Input TRIAC, 1% Dimming	277_TR_DIN


Drawings

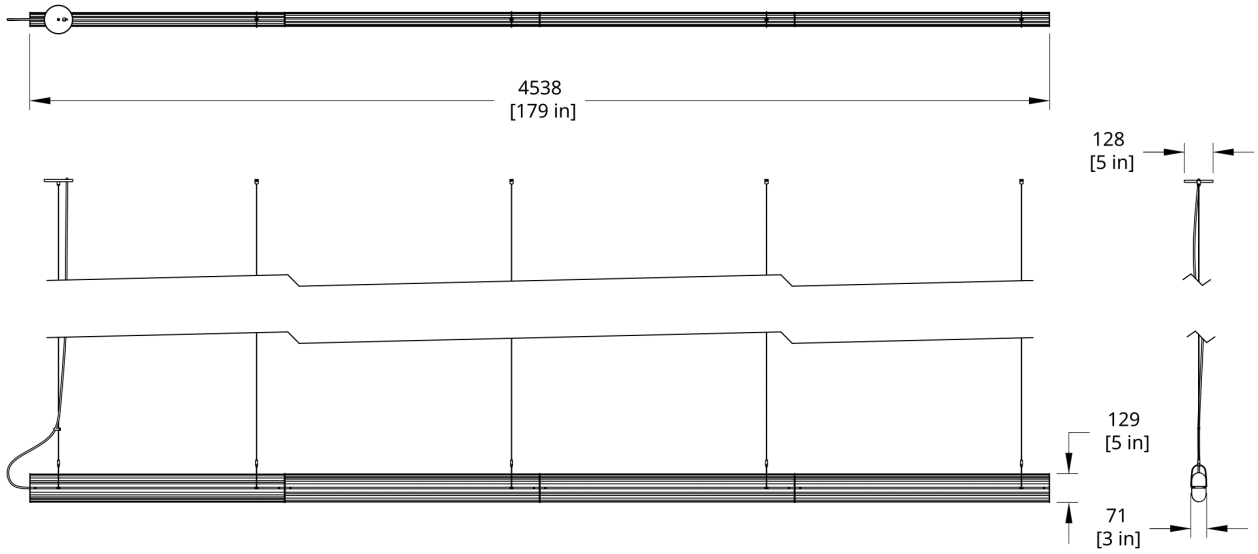


QP-176 Queue Pendant Dimension (Direct Indirect)

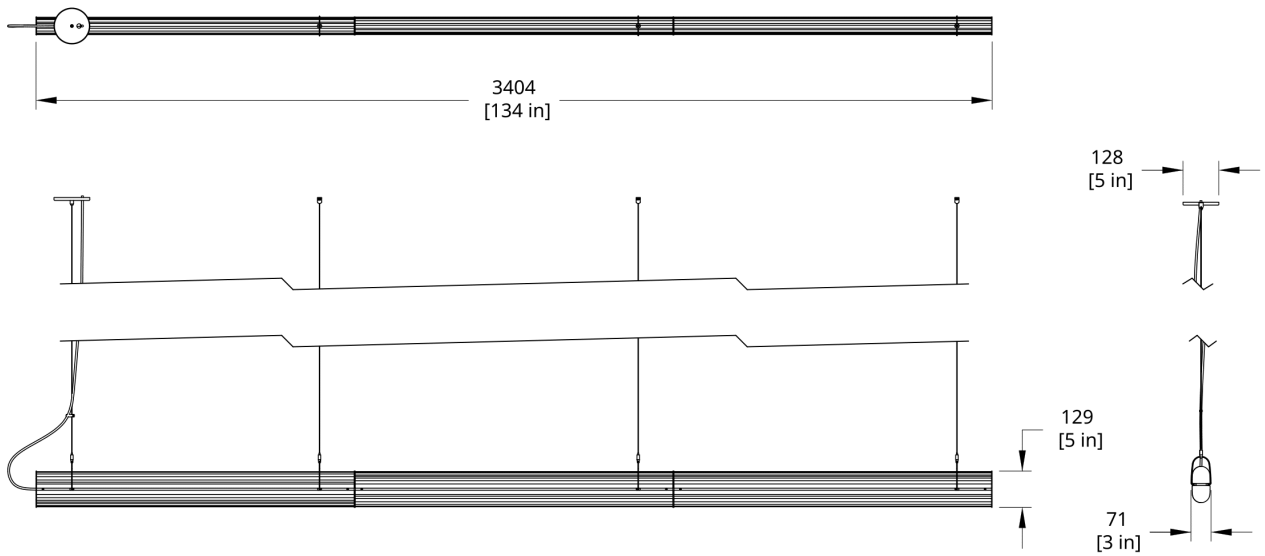

QP-132 Queue Pendant Dimension (Direct Indirect)

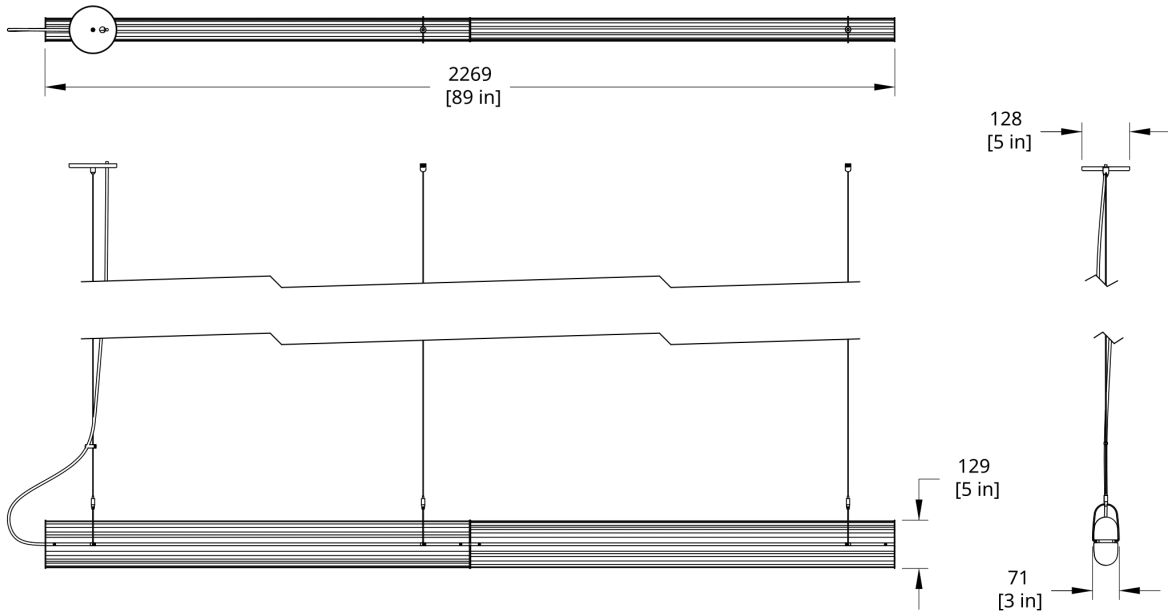

QP-88 Queue Pendant Dimension (Direct Indirect)

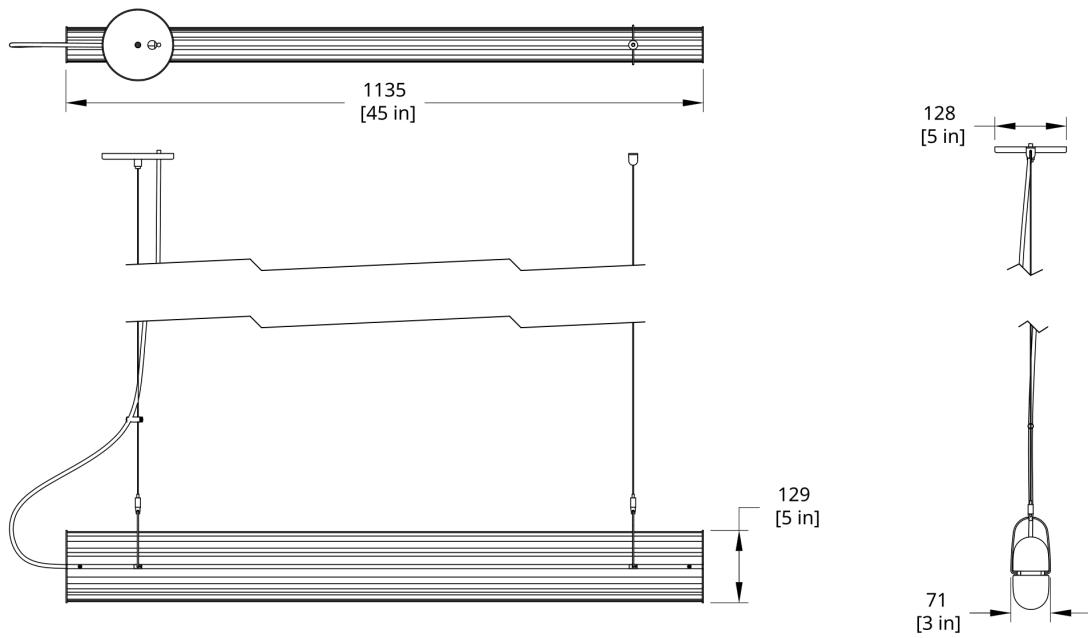

QP-44 Queue Pendant Dimension (Direct Indirect)