

# Rich Brilliant Willing

50 Greene St  
 Floor 2  
 New York NY 10013  
 T +1 212 388 1621  
 sales@richbrilliantwilling.com



QP-1-2-27-UN (Direct in White Gold)

## Queue Pendant Direct

**Year Designed**  
 2015


**Description**  
 Modular LED linear pendant

**Country of Manufacture**  
 USA

**Materials**  
 Anodized aluminum, acrylic lens

**LED Lifespan**  
 50k hours

**Certification**  
 Damp location



**Product Codes SKU**

QP-1-2-27-UN shown above

<b>1</b>	-	<b>1</b>	<b>2</b>	<b>4</b>	-	<b>27</b>	-	<b>UN</b>	<b>10</b>
model		finish		CCT		input			

**Model** 1 (↓), 3 (↑), or 5 (↕)  
**Finish** 1 Nat 2 WhGold 4 Black  
**CCT** 22K, 27K, 30K, or 40K  
**Input** UN 120-277V 10 0-10V

**Specification**  
 Linear LED board  
 38 Watts  
 120-277V Input 50/60Hz  
 Color Temperature Lumen Options  
**2200K** - 614 lm/ft (60 lm/W)  
**2700K** - 621 lm/ft (60 lm/W)  
**3000K** - 638 lm/ft (61 lm/W)  
**4000K** - 717 lm/ft (70 lm/W)  
 (3.7 ft total length)

**Dimming**  
 TRIAC Dimming 2-100% at 120V  
 Optional 0-10V dimming capability

**Dimensions**  
 3 x 4 x 44 in L  
 76 x 100 x 1130 mm L

**Product Weight**  
 8.0 lb. / 3.6 kg.

**Cord Length**  
 72 in / 1829 mm  
 Available in White

**Canopy**  
 Diameter 5 in / 127 mm  
 Color White

**Packaging**  
 52 L x 6 W x 6 in H  
 1320 L x 152 W x 152 mm H

**Packaging Weight**  
 8.0 lb. / 3.6 kg.

# Rich Brilliant Willing

50 Greene St  
 Floor 2  
 New York NY 10013  
 T +1 212 388 1621  
 sales@richbrilliantwilling.com



QP-3-4-27-UN (Indirect in Black)

## Queue Pendant Indirect

**Year Designed**  
 2015


**Description**  
 Modular LED linear pendant

**Country of Manufacture**  
 USA

**Materials**  
 Anodized aluminum, acrylic lens

**LED Lifespan**  
 50k hours

**Certification**  
 Damp location



### Product Codes

QP-3-4-27-UN shown above

<b>3</b>	-	<b>1</b>	<b>2</b>	<b>4</b>	-	<b>27</b>	-	<b>UN</b>	<b>10</b>
model		finish		CCT		input			

**Model** 1 (↓), 3 (↑), or 5 (↕)  
**Finish** 1 Nat 2 WhGold 4 Black  
**CCT** 22K, 27K, 30K, or 40K  
**Input** UN 120-277V 10 0-10V

### Specification

Linear LED board  
 38 Watts  
 120-277V Input 50/60Hz  
 Color Temperature Lumen Options  
**2200K** - 614 lm/ft (60 lm/W)  
**2700K** - 621 lm/ft (60 lm/W)  
**3000K** - 638 lm/ft (61 lm/W)  
**4000K** - 717 lm/ft (70 lm/W)  
 (3.7 ft total length)

### Dimming

TRIAC Dimming 2-100% at 120V  
 Optional 0-10V dimming capability

### Dimensions

3 x 4 x 44 in L  
 76 x 100 x 1130 mm L

**Product Weight**  
 8.0 lb. / 3.6 kg.

**Cord Length**  
 72 in / 1829 mm  
 Available in White

### Canopy

Diameter 5 in / 127 mm  
 Color White

### Packaging

52 L x 6 W x 6 in H  
 1320 L x 152 W x 152 mm H

**Packaging Weight**  
 8.0 lb. / 3.6 kg.

# Rich Brilliant Willing

50 Greene St  
 Floor 2  
 New York NY 10013  
 T +1 212 388 1621  
 sales@richbrilliantwilling.com



QP-5-1-27-UN (Direct/Indirect)

## Queue Pendant Direct/Indirect

**Year Designed**  
 2015


**Description**  
 Modular LED linear pendant

**Country of Manufacture**  
 USA

**Materials**  
 Anodized aluminum, acrylic lens

**LED Lifespan**  
 50k hours

**Certification**  
 Damp location



**Product Codes**

QP-5-1-27-UN shown above

<b>5</b>	<b>1</b>	<b>2</b>	<b>4</b>	<b>27</b>	<b>UN</b>	<b>10</b>
model	finish	CCT	input			

**Model** 1 (↓), 3 (↑), or 5 (↕)  
**Finish** 1 Nat 2 WhGold 4 Black  
**CCT** 22K, 27K, 30K, or 40K  
**Input** UN 120-277V 10 0-10V

**Specification**

Linear LED board  
 76 Watts  
 120-277V Input 50/60Hz  
 Color Temperature Lumen Options  
**2200K** - 1228 lm/ft (60 lm/W)  
**2700K** - 1242 lm/ft (60 lm/W)  
**3000K** - 1276 lm/ft (61 lm/W)  
**4000K** - 1434 lm/ft (70 lm/W)  
 (3.7 ft total length)

**Dimming**

TRIAC Dimming 2-100% at 120V  
 Optional 0-10V dimming capability

**Dimensions**

3 x 4 x 44 in L  
 76 x 100 x 1130 mm L

**Product Weight**  
 8.0 lb. / 3.6 kg.

**Cord Length**  
 72 in / 1829 mm  
 Available in White

**Canopy**

Diameter 5 in / 127 mm  
 Color White

**Packaging**

52 L x 6 W x 6 in H  
 1320 L x 152 W x 152 mm H

**Packaging Weight**  
 8.0 lb. / 3.6 kg.

# Rich Brilliant Willing

50 Greene St  
Floor 2  
New York NY 10013  
T +1 212 388 1621  
sales@richbrilliantwilling.com



QP-9-4 (Spacer in Black)

## Queue Pendant Spacer

**Year Designed**  
2015

**Description**  
Modular LED linear pendant

**Country of Manufacture**  
USA

**Materials**  
Anodized aluminum, acrylic lens

**Certification**  
Damp location

**Product Codes**  
QP-9-4 shown above

9	-	1	3	4
model		finish		

**Model** 9 spacer  
**Finish** 1 Nat 2 WhGold 4 Black

**Specification**  
120V Input 50/60Hz (US & CAN)  
220V Input 50/60Hz (Optional)

**Dimensions**  
3 x 4 x 12-44 in L  
76 x 100 x 1130 mm L


**Product Weight**  
8.0 lb. / 3.6 kg.

**Cord Length**  
72 in / 1829 mm  
Available in White

**Canopy**  
Diameter 5 in / 127 mm  
Color White

**Packaging**  
52 L x 6 W x 6 in H  
1320 L x 152 W x 152 mm H

**Packaging Weight**  
8.0 lb. / 3.6 kg.



# Rich Brilliant Willing


50 Greene St  
Floor 2  
New York NY 10013  
T +1 212 388 1621  
sales@richbrilliantwilling.com



Shown: QP-11-4




Shown: QP-33-4

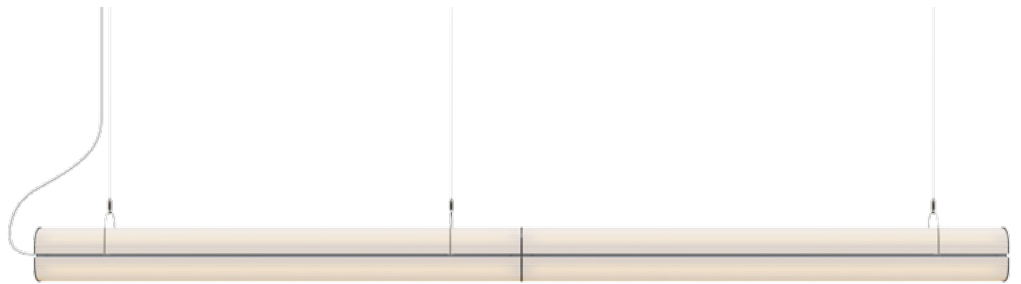

Shown: QP-55-4


## Queue Pendant Double Section

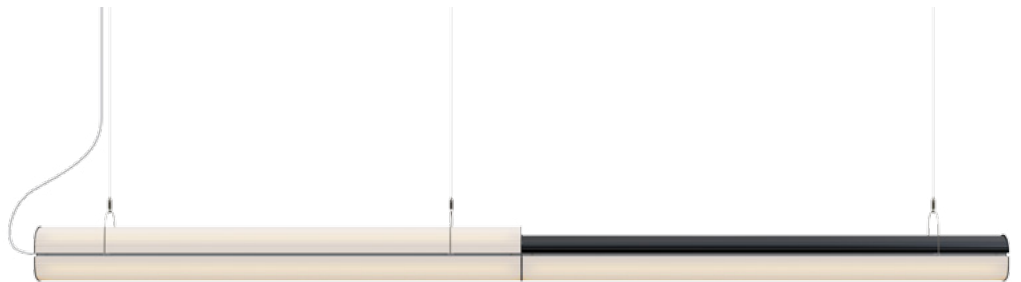

Shown: QP-51-4



Shown: QP-31-4




# Rich Brilliant Willing


50 Greene St  
Floor 2  
New York NY 10013  
T +1 212 388 1621  
sales@richbrilliantwilling.com



Shown: QP-111-4

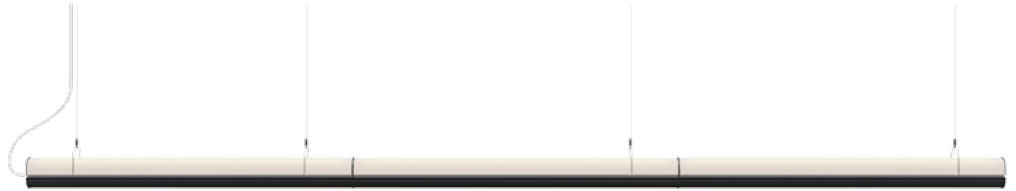

Shown: QP-333-4

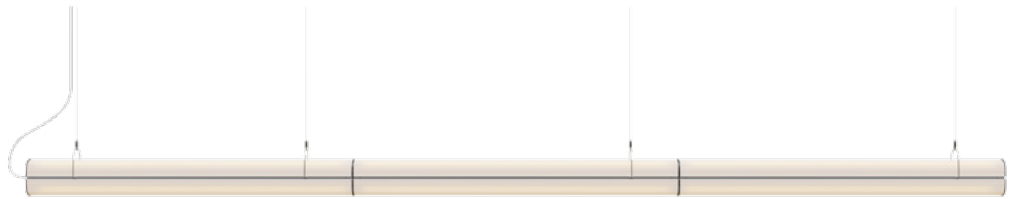

Shown: QP-555-4

## Queue Pendant Triple Section



Shown: QP-511-4



Shown: QP-515-4

