


No. 215

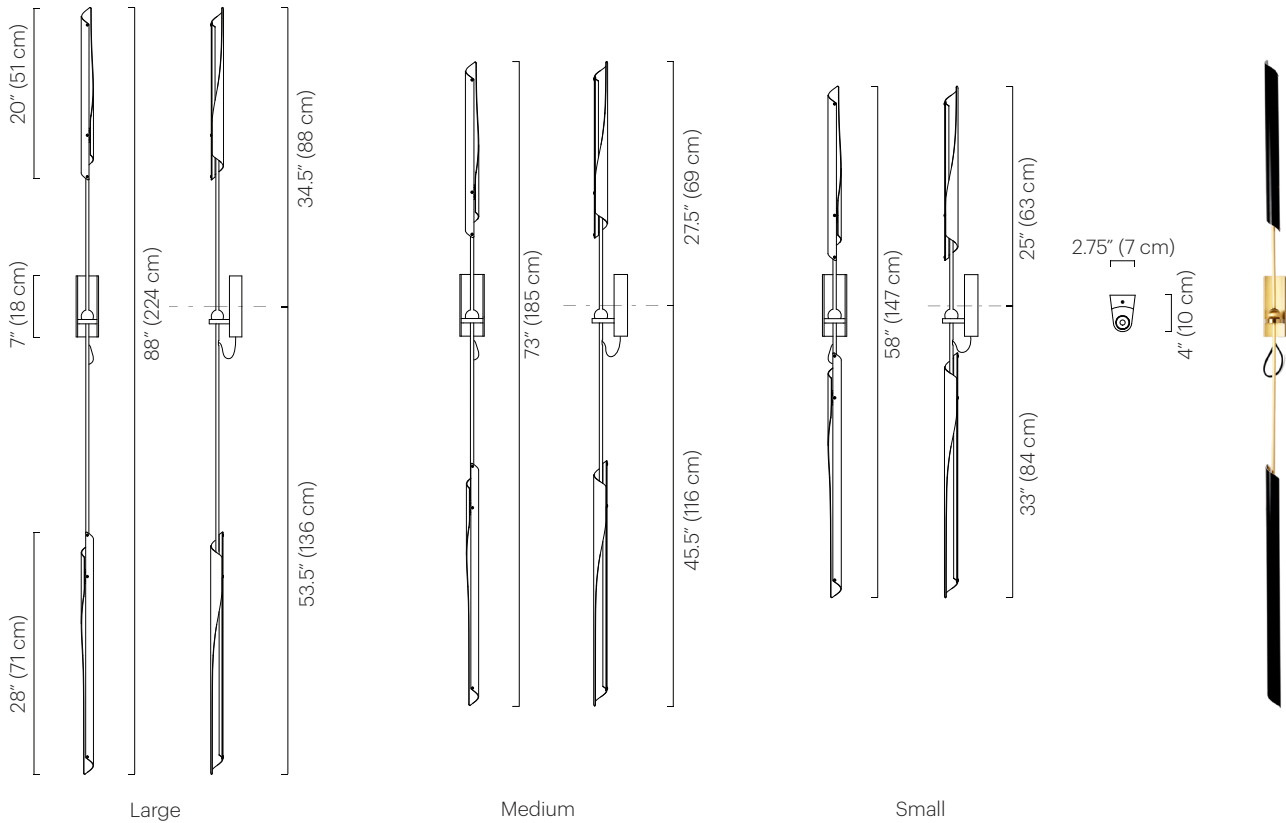

**Description**

The OTTO Sconce is comprised of two different sized OTTO shades mounted on opposite ends of the arm. Each shade contains a dimmable LED source and rotates 300° to cast light directionally. Available in three sizes.

**Materials**

Shade: Powder coated aluminum  
 Wall mount: Plated brass  
 Frame: Plated brass  
 Hardware: Plated and polished brass

**Shade Color**

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

**Finish**

- Brushed Brass
- Polished Nickel

Custom finishes available.

**Lamping**

LED: Warm white 2700K  
 Lumens: 1340 (equivalent to two 60W incandescent bulbs)  
 CRI: 80+  
 LED power source: 40W 24V phase dimmable class 2  
 50,000 LED life hours (approx.)

**Power Supply**

60W 24V  
 For 120V areas: dimmable Class 2 included in canopy.  
 For 220-240V areas: remote power supply only. Not included.

**Dimmer Compatibility**

Dimmable with MLV/TRIAC (leading edge) switch

**Voltage / Wattage**

24 v / 22 watts

**Weight**

10 lbs (4.5 kg)

**Remarks**

ADA compliant depth.  
 Hardwired is standard.  
 Black exterior electrical cord is standard.  
 Hardware finish consistent with frame finish.  
 Indoor use and dry locations only.  
 Wall mount designed to fit 2" x 4" vertical switch box only.

**Dimensions**

Large: 4" D x 2.75" W x 88" H (10 D x 7 W x 224 cm H)  
 Medium: 4" D x 2.75" W x 73" H (10 D x 7 W x 185 cm H)  
 Small: 4" D x 2.75" W x 58" H (10 D x 7 W x 147 cm H)  
 Bracket: 4" D x 2.75" W x 7" H (10 D x 7 W x 18 cm H)  
 Top shade: 1.5" Ø x 20" L (4 Ø x 51 cm L)  
 Bottom shade: 1.5" Ø x 28" L (4 Ø x 71 cm L)

