
## JUNIPER®

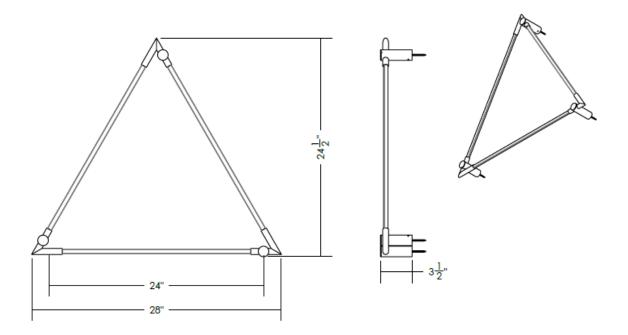

## THIN PRIMARIES WALL-MOUNTED TRIANGLE

## **SPECIFICATIONS**

Segment Length 24 in [61 cm]

Power Supply
R. Standard Remote
120-277V |
2-Wire/TRIAC/Forward-Pha
se, 0-10V,
ELV/Reverse-Phase

**Standoff Height** 3.5 in [90 mm]

Color / Finish Satin Brass

**Color Temperature** 3000K

Lens Finish Frosted

## **MORE INFORMATION & OPTIONS**

LIGHT QUALITY

44.50125

0 CRI 95+, R9 90+ 32.00125

**WATTAGE & LUMENS** 5 24 IN - 20.4W, 0-1800LM 36 IN - 28.8W, 0-2760LM LED LIFESPAN

150,000 hrs, L80 32.00125

WEIGHT

6 24 IN - 2.65 lbs 36 IN - 3.15 lbs 44.50125 **BODY MATERIAL** 

2 Solid Brass, PMMA 32.00125

MOUNTING

7 Wall brackets mount directly to surface 2 X 18AWG in-wall rated cable recommended for remote installation (provided by electrician) 44.50125 CERTIFICATIONS

3 cUL, UL, CE, Damp Location Rated, Title 24 32.00125 DESIGNER

4 Peter Bristol 32.00125