


# Copia Sconce

Sconces



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com

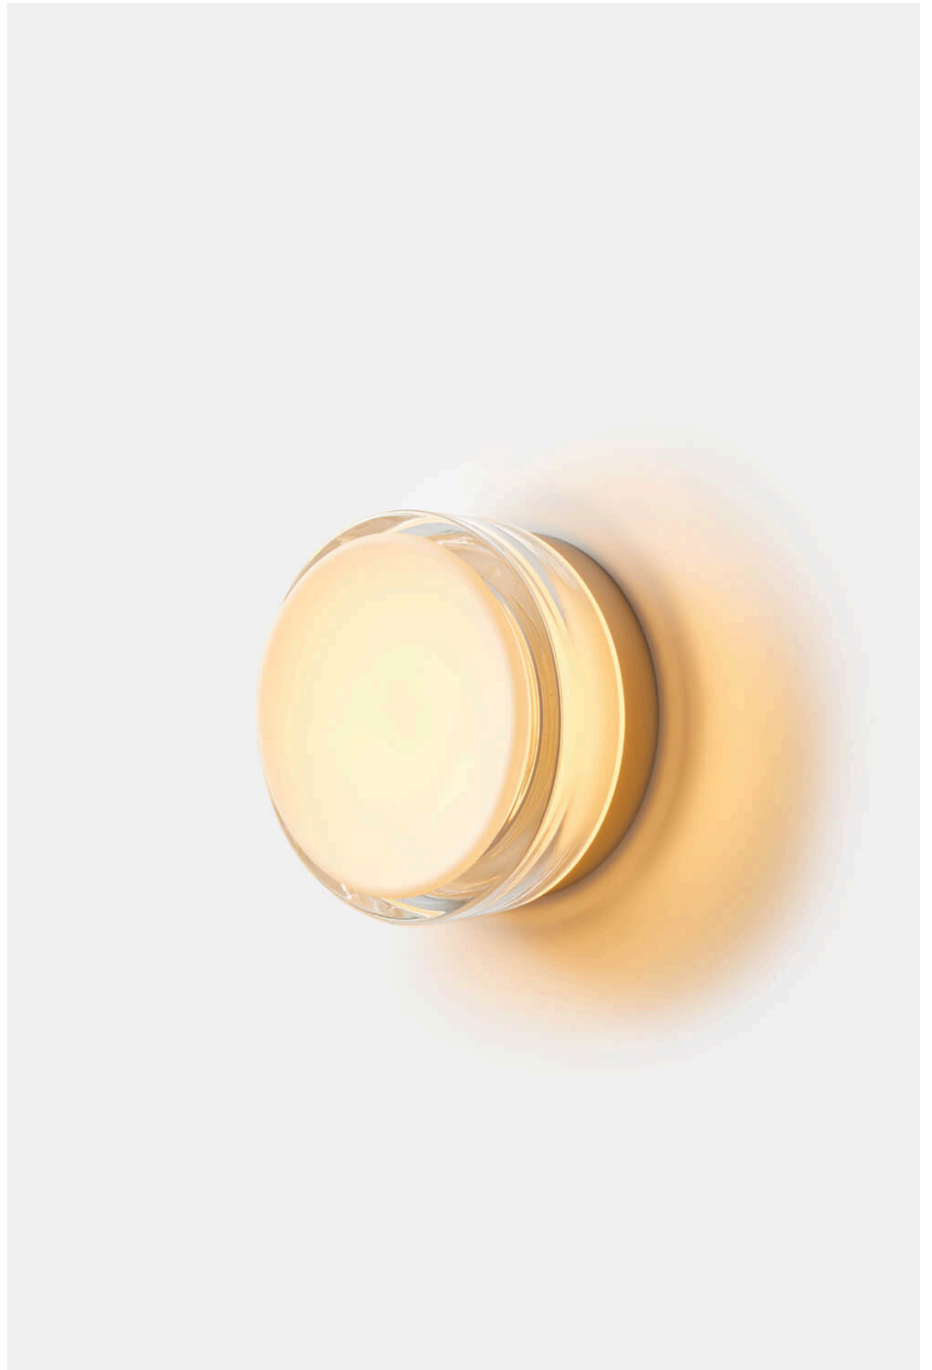

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

**DESCRIPTION**

A collection that showcases the innovative use of unique materials, created in collaboration with Little Wing Lee of Studio & Projects.

**MATERIALS**

Cast solid glass, polycarbonate, aluminum

**PERFORMANCE**

Delivered Lumens: 517.6 lm (Simply Clear) | 297.1 lm (Warm Grey)

Power Consumption: 7.1W (DC)

Luminaire Efficacy: 72.2 lm/W (Simply Clear) | 41.8 lm/W (Warm Grey)

90+ CRI

**LED LIFESPAN**

50k hr

**PATENT FILE NUMBER**

Patent Pending

**CERTIFICATION**

ADA Compliant

UL Listed

Suitable for Damp Locations

IP20

**NOTE ON IMAGERY**

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

**PRODUCT DIMENSIONS**

5.4 in dia x 2.7 in D

Generate Date: Tue Mar 19 2024

**PRODUCT WEIGHT**

2.5 lbs

**DIMENSIONAL WEIGHT**

3 lbs

---

**YOUR PRODUCT CODE**

**CO-WS-**  -  -  -  -

---

Specification Logic

**GLASS FINISH**

---

Simply Clear	S14
Warm Grey	S15
Midnight	S16
Frosted	S22

**BACKPLATE FINISH**

---

Natural Anodized	AA01
Black Anodized	AA04

**COLOR TEMPERATURE**

---

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

**DIMMING / CONTROL / INPUT**

---

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
Low Voltage (Driver required, driver not included)	LV

Generate Date: Tue Mar 19 2024



**IP RATING**

---

IP 20

IP20

# Drawings

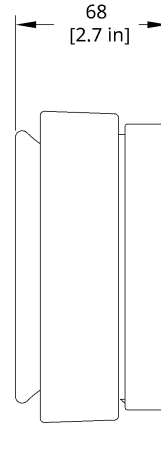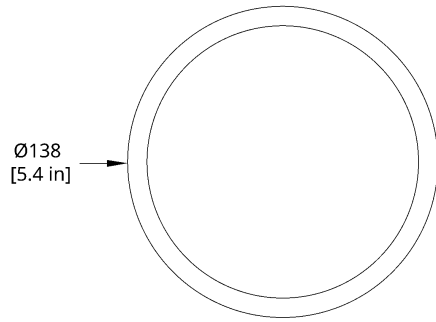

CO-WS Copia Sconce