


# Ripple Sconce

Sconces



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

**DESCRIPTION**

Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water.

**MATERIALS**

Cast solid glass, aluminum

**COLLECTION NOTES**

Luminaire lumens listed are for AC input Triac control. DC input are within photometry downloads.

**LED LIFESPAN**

50k hours

**CERTIFICATION**

ADA Compliant

UL Listed

Suitable for Wet Locations

IP65

**PRODUCT DIMENSIONS**

5" Dia. x 3.3" Depth

**PRODUCT WEIGHT**

3.5 lbs / 2 kg

**DIMENSIONAL WEIGHT**

3 lbs

---

YOUR PRODUCT CODE

**RP-WS-S21-AA01-27-120\_TR\_LINE-IP65**

---

Specification Logic

**GLASS FINISH**

---

|                 |     |
|-----------------|-----|
| White Interior  | S20 |
| Smoked          | S21 |
| Frosted         | S22 |
| Copper Exterior | S23 |
| Jade            | S24 |

**BACKPLATE FINISH**

---

|                  |      |
|------------------|------|
| Natural Anodized | AA01 |
| Black Anodized   | AA04 |

**COLOR TEMPERATURE**

---

|                       |    |
|-----------------------|----|
| 2700K (warm white)    | 27 |
| 3000K (soft white)    | 30 |
| 3500K (neutral white) | 35 |

**INPUT / CONTROL / POWER**

---


|  |             |
|--|-------------|
| 110-120V Input TRIAC / ELV / 0-10V, 1% dimming   | 120_TM_DEX  |
| 110-120V Input TRIAC Control 10% dimming         | 120_TR_LINE |
| 220-240V Input 0-10V, 1% dimming                 | 220_10_DEX  |
| 220-240V Input ELV Reverse Phase, 1% dimming     | 220_ELV_DEX |
| 220-240V Input TRIAC / Forward Phase, 1% dimming | 220_TR_DEX  |
| 110-277V Input 0-10V, 0.1% dimming               | 277_10_DEX  |
| 110-277V Input DALI, 0.1% dimming                | 277_DL_DEX  |

**IP RATING**

---

|       |      |
|-------|------|
| IP 65 | IP65 |
|-------|------|

# Drawings

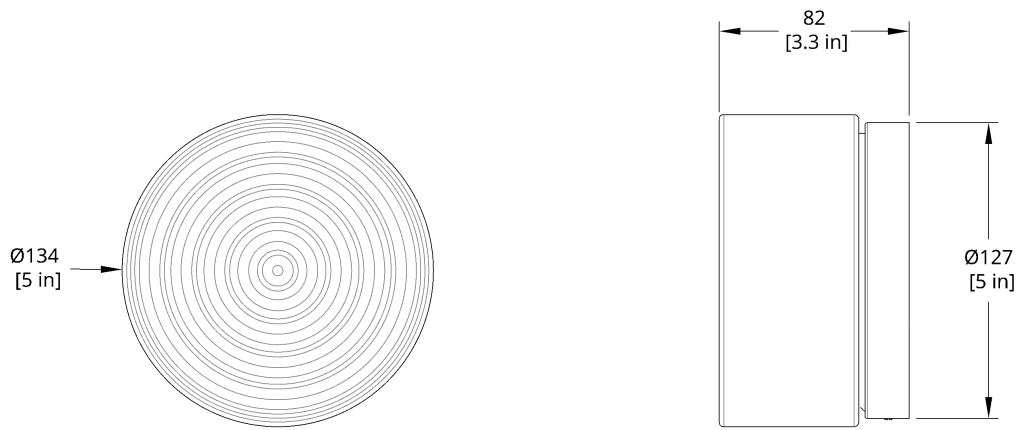

RP-WS Ripple Sconce Dimension (Rotate 90 degrees for flush mount version)