



Spool

Pendants

YOUR PRODUCT CODE

SP-40W-15H-27-DL09-IL00-FB01-LV

DESCRIPTION

Spool delivers an acoustic performance element while taking up a sculptural presence in any space, especially in groups. Its surprising details create a refined edge to an otherwise iconic shape. In a world full of noise and chaos, there is profound elegance in the simple elements of design. Using a variety of optic configurations, Spool finds its elemental niche in your designs. Add one or a cluster to make a signature interior statement.

MATERIALS

Aluminum, PU Foam, PET, Fabric (51% post-consumer recycled polyester, 49% polyester)

PRODUCT DIMENSIONS

W 20 x H 15 in | W 20 x H 30 in | W 40 x H 15 in | W 40 x H 30 in

PRODUCT WEIGHT

W 20 x H 15: 12 lb / 5.5 kg, W 20 x H 30: 20 lb / 9 kg, W 40 x H 15: 25 lb / 11.3 kg, W 40 x H 30: 40 lb / 18 kg

PERFORMANCE

Coming soon

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Pending

SUSPENSION

White 7" round deep canopy
 Standard 72" black cord
 Standard Hang Height 66"
 Minimum Hang Height 6"
 Cord is field trimmable

SPECIFICATION LOGIC

WIDTH

20" Wide	20W
40" Wide	40W

HEIGHT

15" High	15H
30" High	30H

CCT

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
4000K (cool white)	40

DIRECT LIGHT

12° Spot	DL09
24° Narrow	DL10
35° Narrow Flood	DL11
55° Flood	DL12

INDIRECT LIGHT

No Indirect Optic	IL00
12° Spot	IL09
24° Narrow	IL10
35° Narrow Flood	IL11
55° Flood	IL12

UPHOLSTERY FINISH


Crosswalk Fabric	FB01
Playground Fabric	FB02


DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
Low Voltage (Driver required, driver not included)	LV

DRAWINGS





Spool Pendant 20Wx15H



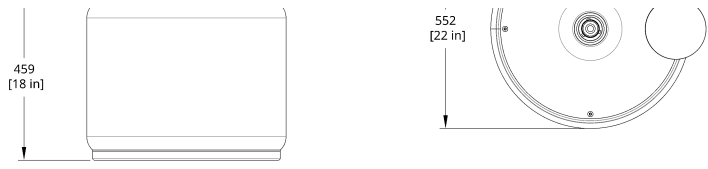

Spool Pendant 20Wx30H

Spool Pendant 40Wx15H



Spool Pendant 40Wx30H

