


Vitis 1

Chandeliers



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



Vitis may be provided with longer or shorter cord segments upon request.

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com

Generate Date: Wed Jan 10 2024

DESCRIPTION

Designed so that no two installations are exactly alike, Vitis, is a draped modular statement chandelier with customizable possibilities. Its flexible, translucent cables accommodate blown-glass orbs at various heights, giving the appearance of lights floating in space.

MATERIALS

Blown glass globes, metal cord grips, woven cord

COLLECTION NOTES

Vitis comes with 120 in / 3048 mm cord between globes. Custom length available upon request.
Power enclosure comes with every order.

PERFORMANCE

Delivered Lumens 182 lm (Ivory) 143 lm (Smoked)

Power Consumption 6.5W

Luminous Efficacy Per Globe 28.1 lm/W (Ivory) 22.1 lm/W (Smoked)

90 CRI (Ivory) 95 CRI (Smoked)

LED LIFESPAN

50k hours

PATENT FILE NUMBER

Patent Number D930,226, 187450, 201912511, 006433652-0001

CERTIFICATION

UL Listed

Suitable for Damp Locations



NOTE ON IMAGERY

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

YOUR PRODUCT CODE**VS-1-IV-CB-AA01-27-1_TRIAC_120V**

Specification Logic

GLASS FINISH

Ivory	IV
Frosted Smoked	SM

Generate Date: Wed Jan 10 2024

CORD FINISH

Black Cord	CB
Custom Color Cord	CX
White Cord	CW

CORD GRIP FINISH

Black Anodized	AA04
Natural Anodized	AA01
White Gold Anodized	AA02
Custom Powder Coated	PCXX
Polished Chrome	PF13


COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

DIMMING / CONTROL / INPUT

1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
Low Voltage (Driver required, driver not included)	LV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV

Drawings

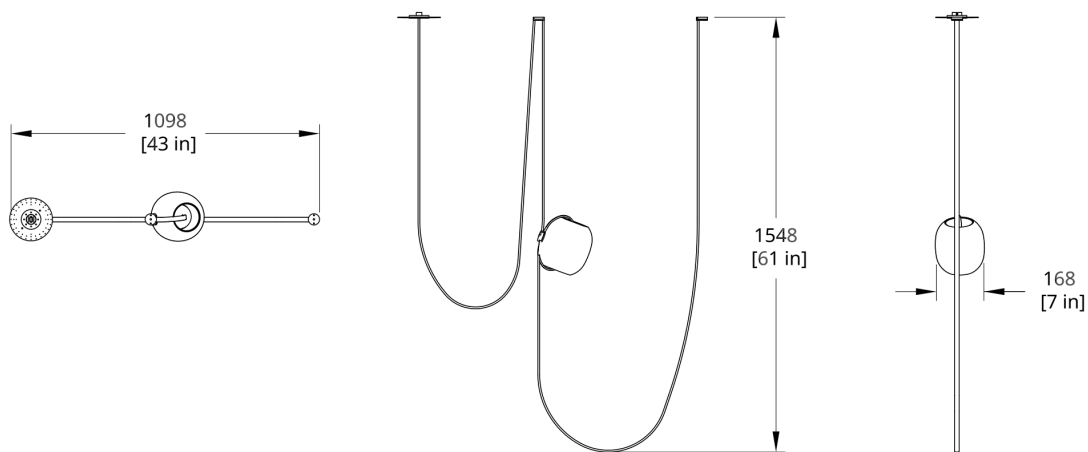

VS-1 Vitis Chandelier Dimension