


# Vitis 7

Chandeliers



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com

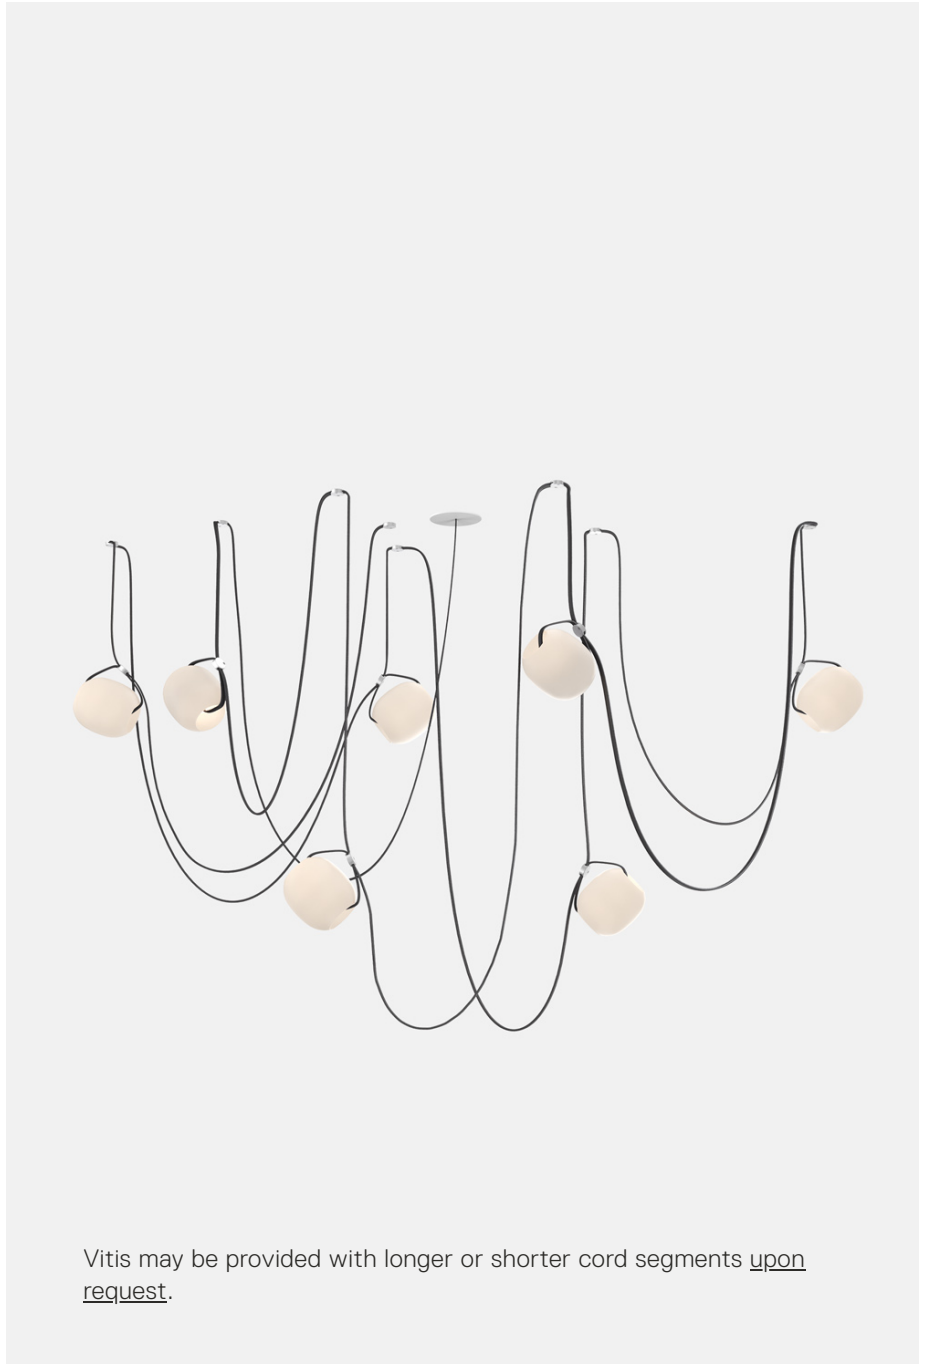

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

Generate Date: Wed Jan 10 2024

**DESCRIPTION**

Designed so that no two installations are exactly alike, Vitis, is a draped modular statement chandelier with customizable possibilities. Its flexible, translucent cables accommodate blown-glass orbs at various heights, giving the appearance of lights floating in space.

**MATERIALS**

Blown glass globes, metal cord grips, woven cord

**COLLECTION NOTES**

Vitis comes with 120 in / 3048 mm cord between globes. Custom length available upon request.  
Power enclosure comes with every order.

**PERFORMANCE**

Delivered Lumens 1274 lm (Ivory) 1000 lm (Smoked)  
Power Consumption 45.5W  
Luminous Efficacy Per Globe 28.1 lm/W (Ivory) 22.1 lm/W (Smoked)  
90 CRI (Ivory) 95 CRI (Smoked)

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

Patent Number D930,226, 187450, 201912511, 006433652-0001

**CERTIFICATION**

UL Listed  
Suitable for Damp Locations



**NOTE ON IMAGERY**

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

**SUSPENSION**

White 6" round flat canopy, 6" mud-in (recessed) canopy. (8) ceiling grips and (1) end grip included. Standard 120" cord between globes. Custom cord length available upon request. Recommended Hang Height 66", refer to dimensional drawings for more info  
Not field trimmable

**PRODUCT DIMENSIONS**

Dimension will vary base on selected configuration. Please download Tech Pack for details.

**DIMENSIONAL WEIGHT**

121 lbs

---

**YOUR PRODUCT CODE**

**VS-7-IV-CB-AA01-27-1\_TRIAC\_120V**

---

Specification Logic

**GLASS FINISH**

---

Ivory	IV
Frosted Smoked	SM

**CORD FINISH**

---

Black Cord	CB
Custom Color Cord	CX
White Cord	CW

**CORD GRIP FINISH**

---

Black Anodized	AA04
Natural Anodized	AA01
White Gold Anodized	AA02
Custom Powder Coated	PCXX
Polished Chrome	PF13

**COLOR TEMPERATURE**

---


2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

**DIMMING / CONTROL / INPUT**


---

1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV


Drawings

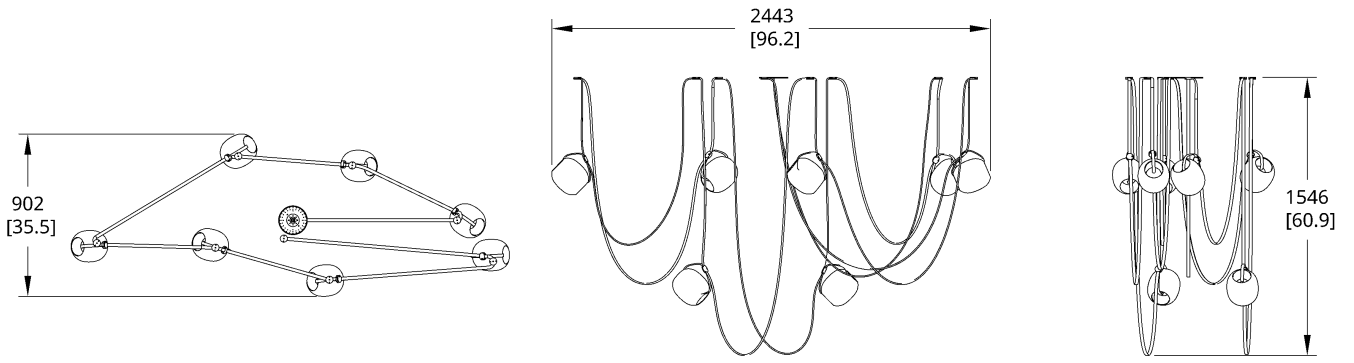

VS-7 Vitis Chandelier (Condensed)

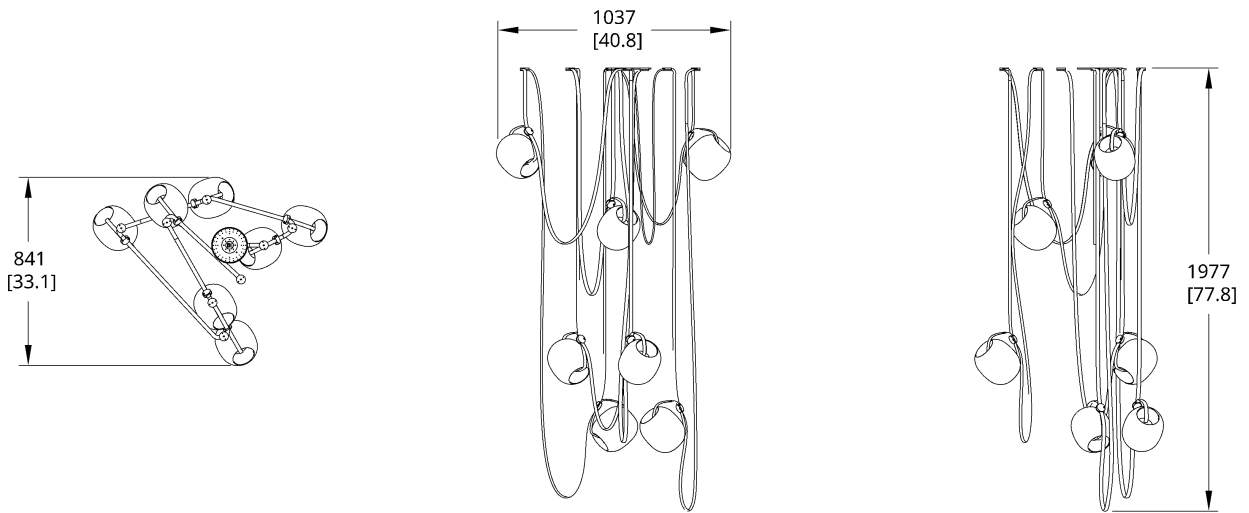

VS-7 Vitis Chandelier (Long)

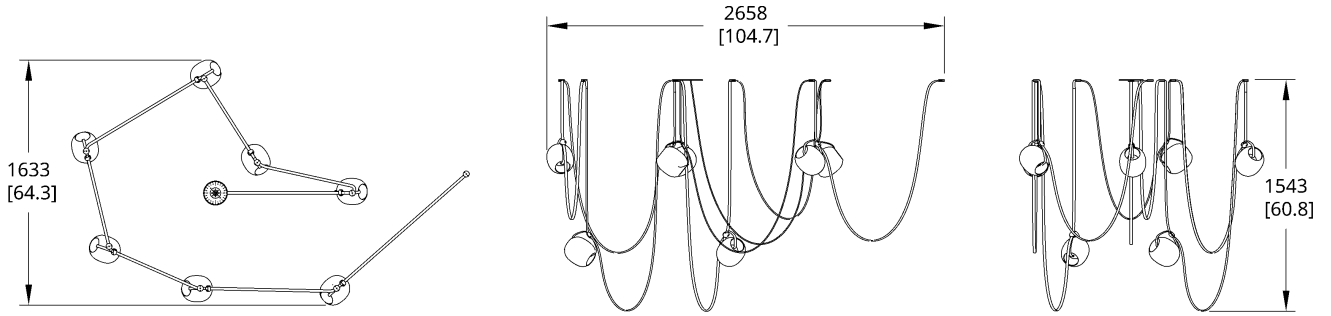

VS-7 Vitis Chandelier (Open)